






Mystical Whimsy Quilt – Class 10



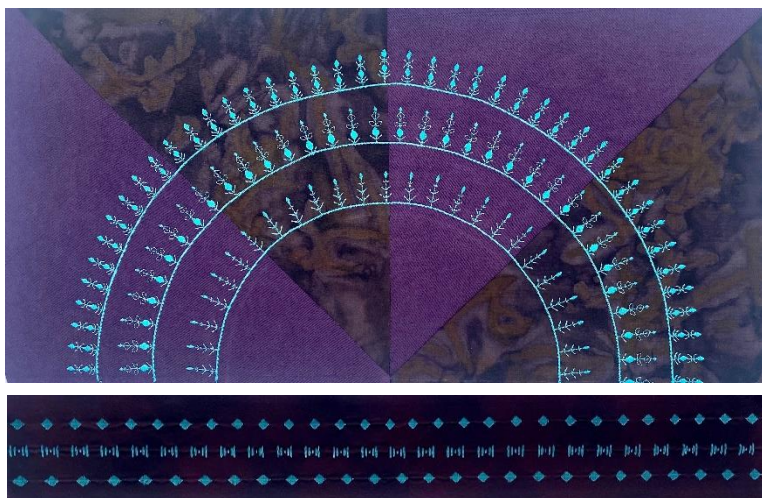

Radiant Stitches & Floating Stitches

PFAFF® is known for its innovative and exclusive stitches. Experience these unique, advanced sewing techniques with Radiant Stitches and Floating Stitches. Sew decorative stitches along a curved line using Radiant Stitches. These stitches will be spread out equally along the line. Then discover how Floating Stitches create a beautiful stitch without visible connecting stitches that makes the stitch look like it is floating over the fabric.



Supplies:

Fabric #2		1(4" x 20") Floating Stitches
Fabric #7		1(11" x 11") Half Square Triangle
Fabric #8* Faux Suede		1(11" x 11") Half Square Triangle
¼ Inch Quilting Foot for IDT™ System or Clear ¼" Inch Quilting Foot for IDT™ System		Part #820926096 or Part #820883096

2A Fancy Stitch Foot		Part #820774096
Bi Level Guide Foot for IDT™ System		Part #68003085 Note: this foot is included with some models, but it is also available for other models as an optional foot.
Open-Toe Appliqué Foot for IDT™ System, 9mm or Clear Open-Toe Foot for IDT™ System	 	Part #820213096 or Part #820916096
Sewing Star Foot for IDT™ System		Part #820654096
Extension Table		Part number will be dependent on PFAFF® sewing machine model
PFAFF® Tear-A-Way Stabilizer 20" x 10 yards		Part #821399096 1(4" x 20") 1(11" x 20")
PFAFF® Universal Needle Size 80/12, 5 pack		Part #821194096
PFAFF® Topstitch Needle Size 90/14, 5 pack		Part #821196096
50wt Cotton Sewing Thread		
Robison-Anton Poly Filament Bobbin Thread		Part #140000905

<p>Robison-Anton 40wt Rayon Thread</p>		<p>Part number based on color</p>
<p>PFAFF® 4"/10.2cm Micro Tip Straight Blade Scissor</p>		<p>Part #821286996</p>
<p>SINGER® Steam Iron</p>		<p>Part number dependent on iron model.</p>
<p>Straight Pins</p>		
<p>Chalk Marker</p>		
<p>Water-soluble Marker</p>		
<p>Rotary Cutter, Mat, 6" x 24" Ruler</p>		
<p>Compass with Extension</p>		
<p>15" Bristol Board Circle from Class 7</p>		
<p>1 Piece Bristol board (22" x 28")</p>		
<p>Other Supplies</p> <ul style="list-style-type: none"> ● Ironing Surface ● Permanent Marker ● Paper scissors 		

Half Square Triangle

Sewing Machine Preparations


1. Insert a PFAFF® Universal Needle Size 80/12 in your PFAFF® sewing machine.
2. Attach the Extension Table, this will give you a larger sewing surface and better support for your project.
3. Thread with 50wt cotton sewing thread on top and on the bobbin.
4. Attach the ¼ Inch Quilting Foot for IDT™ System or Clear ¼ Inch Quilting Foot for IDT™ System to your PFAFF® sewing machine and engage the IDT™.
5. Select a Straight Stitch.

Fabric Preparation

1. On the wrong side of the 11" x 11" piece of Fabric #8 using chalk or the water-soluble marker, draw a line on the diagonal.

Sewing Instructions

1. Place the 11" x 11" of Fabric #8 and #7 right sides together. Pin together.
2. Stitch using a ¼" seam allowance on each side of the drawn line.
3. Cut along the drawn line.
4. Press the seam allowance to one side using a SINGER® Steam Iron.
5. You will now have 2 half square triangles.

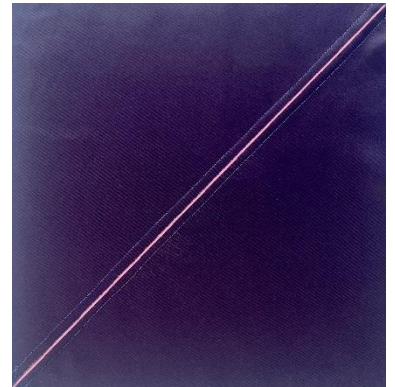



6. Trim the squares to measure 10¼" x 10¼".
7. Place the squares right sides together and sew with a ¼" seam allowance.
8. Press.
9. Draw a ¼" line across the bottom.



Radiant Stitches


Templates

1. On the piece of Bristol board cut out a 12½" square and a 9½" square.
2. Use the permanent marker and draw the centerlines on each piece.
3. Using a compass and an extension bar draw a 12" diameter circle on the 12½" square and a 9" diameter circle on the 9½" square.
4. Cut out the circles using paper scissors.

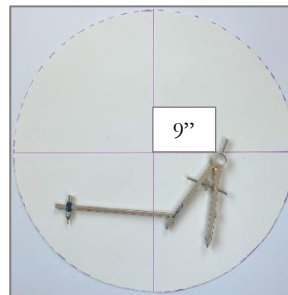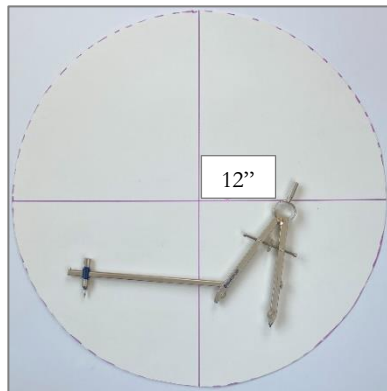

Fabric Preparation

1. Place the 15" template on top of the fabric and match the drawn centerlines on the template to the center seam line and the ¼" drawn line on the bottom.
2. Trace the circle template with the chalk marker.
3. Remove the template.

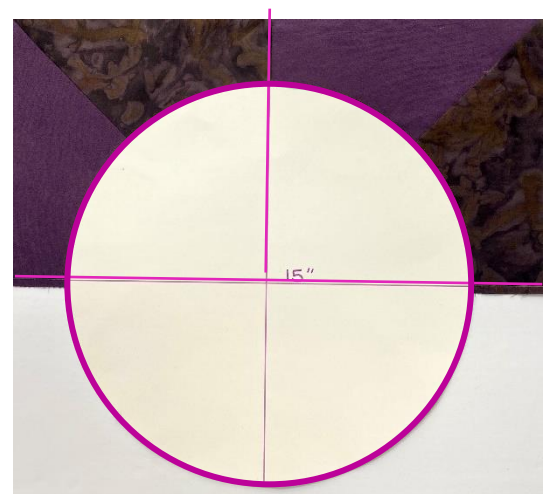



Sewing Machine Preparations

1. Insert a PFAFF® Topstitch Needle Size 90/14 in your PFAFF® sewing machine.
2. Thread with Robison-Anton 40wt Rayon thread on top and Robison-Anton Poly Filament Bobbin thread on the bobbin.
3. Attach the Sewing Star Foot for IDT™ System or the 2A Fancy Stitch Foot to your PFAFF® sewing machine. Note: either foot will work for the Radiant Stitches it just depends on your preference.





Sewing Instructions for Radiant Stitches

1. On the *creative icon*™ 2, open the **Help Center**.
2. In the **Help Center**, select **Techniques and Tutorials**.

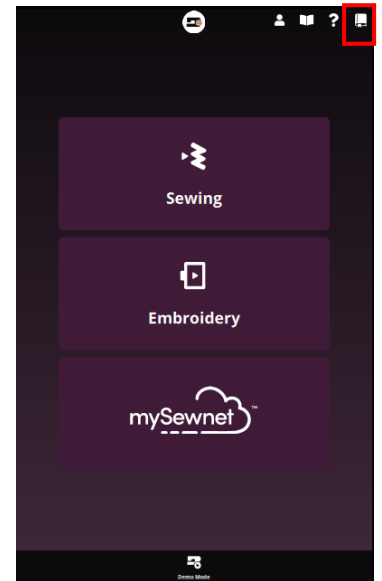
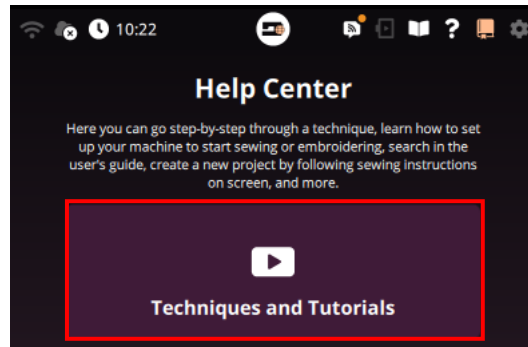


3. Select **Sewing Techniques** and **Exclusive Stitch Techniques**.

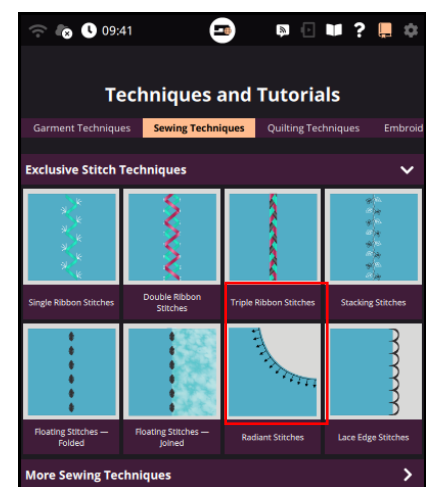
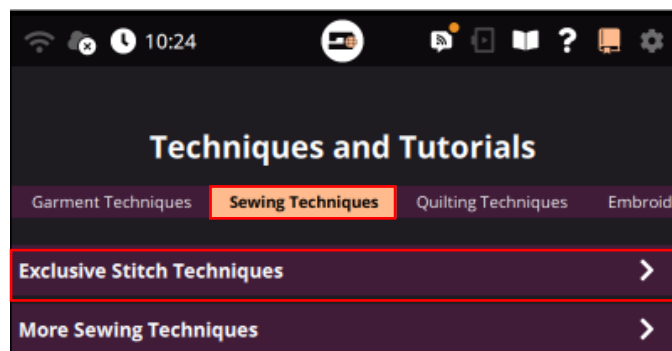


4. Select **Radiant Stitches**.

5. Follow the tutorial and watch the videos for stitching **Radiant Stitches** along a curved line.

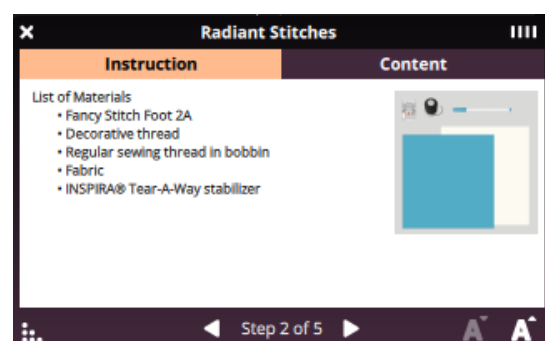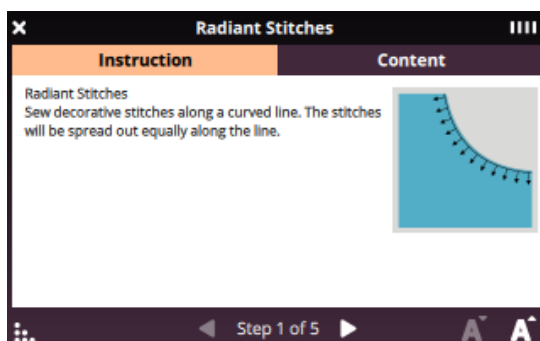

- You can select your **Radiant Stitch**, by selecting it through the **Content** menu in the tutorial, or select **Techniques, Menu 8.6** through the **Load Stitch** menu. Choose any **Radiant Stitch** that you want to sew along the half circle.
- Note when you select a **Radiant Stitch** the **Needle Down** feature will automatically be activated.

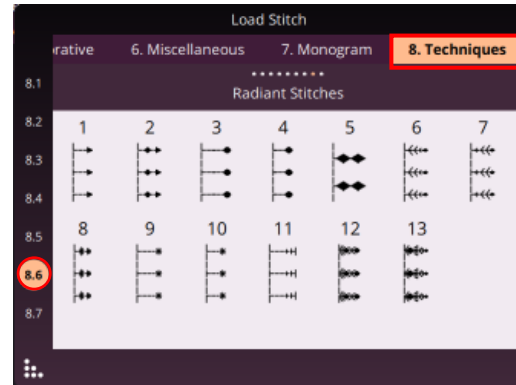
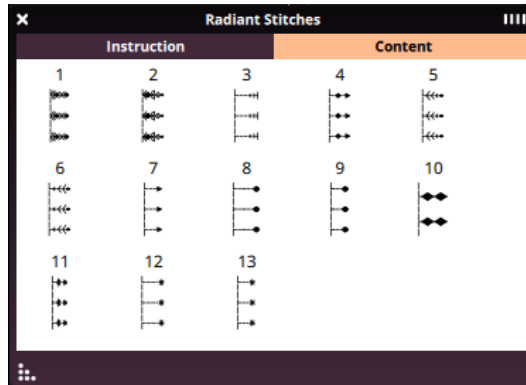


- Place the 11" x 20" piece of PFAFF® Tear-A-Way Stabilizer under the fabric.
- Line up the center marking of the presser foot with the drawn half circle.
- Touch **Start/Stop** and sew until the machine stops.
- Turn the fabric so the two side markings on the foot match the stitched circle.
- Touch **Start/Stop** again and sew until the machine stops. Note: the decorative part of the stitch will be sewn behind the presser foot (the machine will sew backwards and then forwards until it ends up in the pivot position again).
- Turn the fabric to its original position so that the marked circle is even with the center marking of the presser foot.
- Touch **Start/Stop** and the machine will sew the straight stitches along the stitched circle until it stops again.
- Repeat until you have stitched the entire half circle.



Sewing Machine Preparations

1. Attach the Open-Toe Appliqué Foot for IDT™ System or Clear Open-Toe Foot for IDT™ System. Note: either foot will work for the Narrow Satin Stitch it just depends on your preference.
2. Open the mySewnet Folder / File Manager.
3. Select the Narrow Satin Stitch you created and saved in Class #8 (Drunkard's Path).

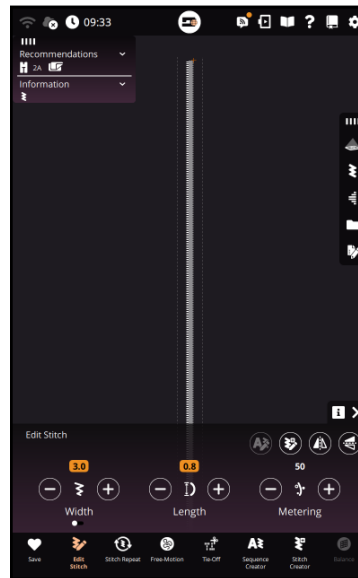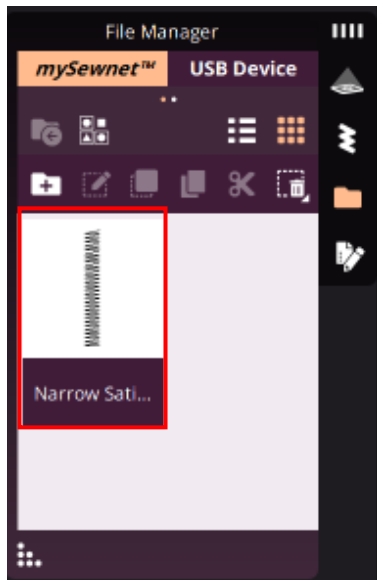


Sewing Instructions for Narrow Zigzag Stitch

1. Stitch the Narrow Satin Stitch over the Straight Stitch at the base of the Radiant Stitches.



Fabric Preparation

1. Place the 12" template on top of the fabric and match the drawn centerlines on the template to the center seam line and the ¼" drawn line on the bottom.
2. Trace the circle template with the chalk marker.
3. Remove the template.

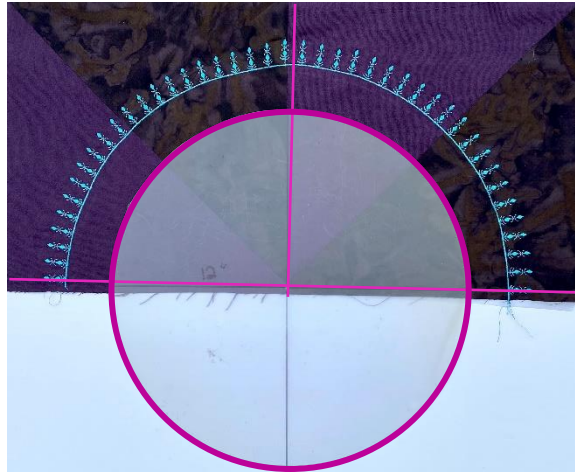


Sewing Machine Preparations

1. Attach the Sewing Star Foot for IDT™ System or the 2A Fancy Stitch Foot to your PFAFF® sewing machine.
2. Select a different Radiant Stitch.


Sewing Instructions for Row 2 of Radiant Stitches

1. Line up the center marking of the presser foot with the 12" drawn half circle.
2. Stitch the Radiant Stitch around the half circle.
3. Switch to sewing the Narrow Satin Stitch on the Straight Stitch at the base of the Radiant Stitches.

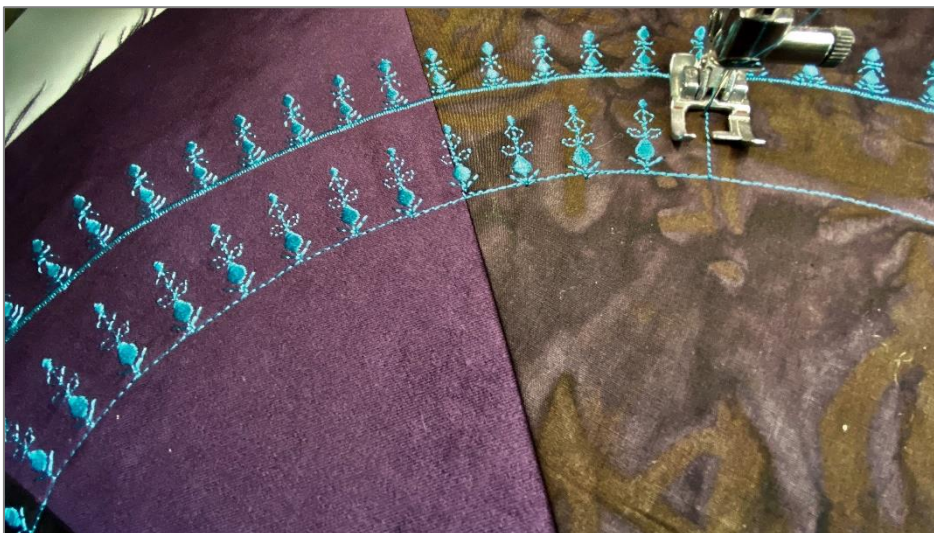

Fabric Preparation

1. Place the 9" template on top of the fabric and match the drawn centerlines on the template to the center seam line and the 1/4" drawn line on the bottom.
2. Trace the circle template with the chalk marker.
3. Remove the template.

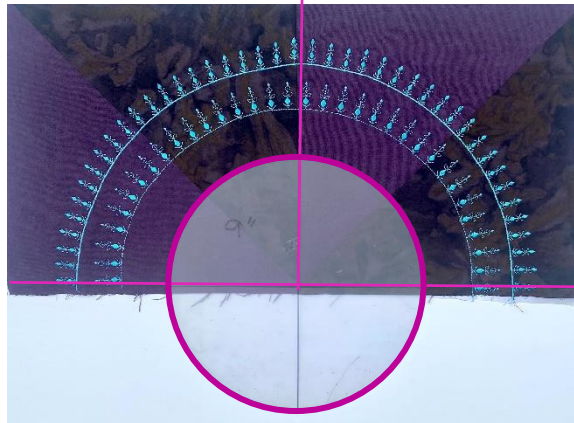

Sewing Machine Preparations

1. Attach the Sewing Star Foot for IDT™ System or the 2A Fancy Stitch Foot to your PFAFF® sewing machine.
2. Select a different Radiant Stitch.


Sewing Instructions for Row 3 of Radiant Stitches

1. Line up the center marking of the presser foot with the 9" drawn half circle.
2. Stitch the Radiant Stitch around the half circle.
3. Switch to sewing the Narrow Satin Stitch on the Straight Stitch at the base of the Radiant Stitches.
4. Set aside for Class 11.



Floating Stitches-Folded

Create a beautiful stitch without visible connecting stitches, floating over the fabric.


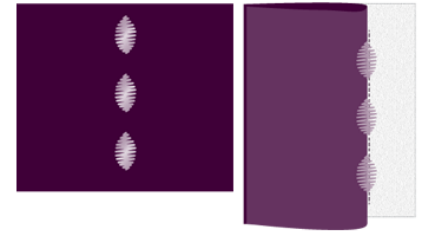


Sewing Machine Preparations



1. Attach the Bi-Level Foot for IDT™ to your PFAFF® sewing machine.

Sewing Instructions for Floating Stitches

1. On the *creative icon*™ 2, open the **Help Center**.
2. In the **Help Center**, select **Techniques and Tutorials**.

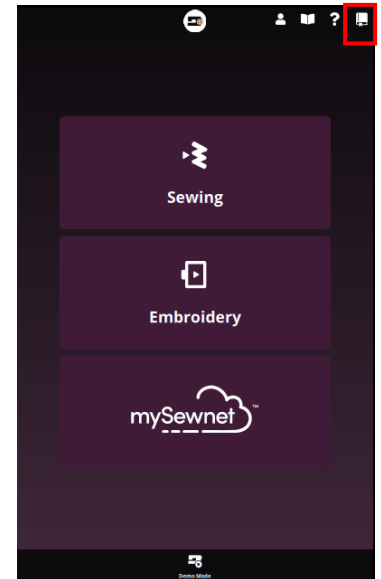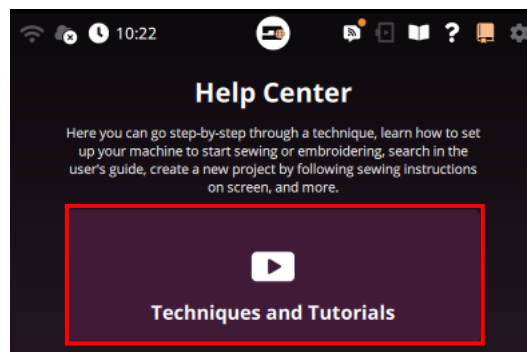


3. Select **Sewing Techniques** and **Exclusive Stitch Techniques**.

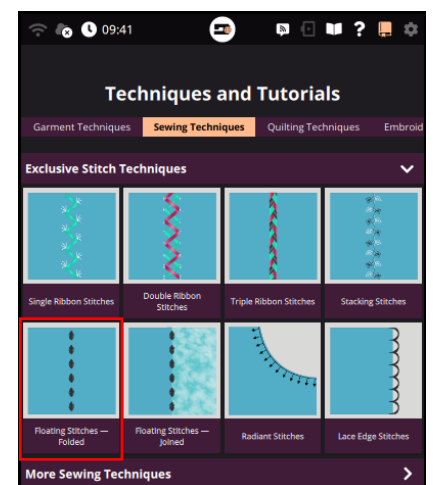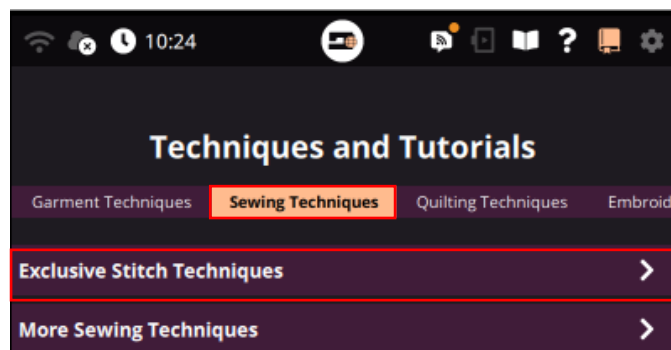


4. Select **Floating Stitches - Folded**.

5. Follow the tutorial and watch the videos for stitching **Floating Stitches - Folded**.


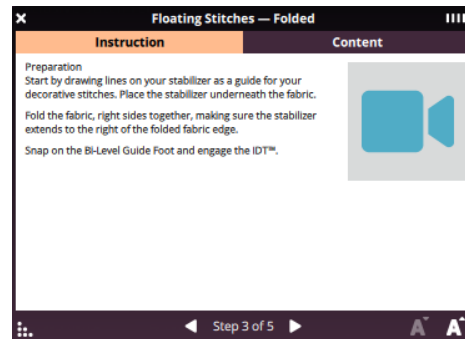


6. Fabric preparation: Start by drawing a line down the center on your 4" x 20" piece of PFAFF® Tear-A-Way Stabilizer using the water-soluble marker. Then draw a line $\frac{3}{4}$ " on each side of the center. Also, draw a beginning line.

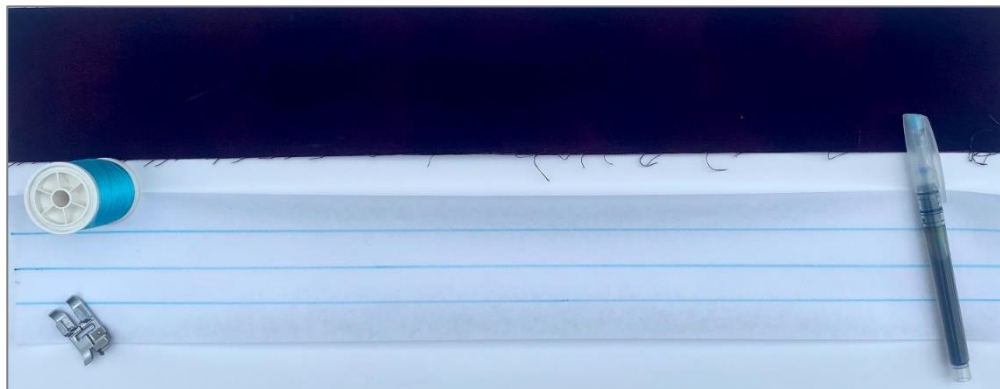


7. You can select your **Floating Stitch**, by selecting it through the **Content** menu in the tutorial, or select **Techniques, Menu 8.5** through the **Load Stitch** menu.


8. Choose your **Stitch 8.5.4** or a stitch of your choosing.

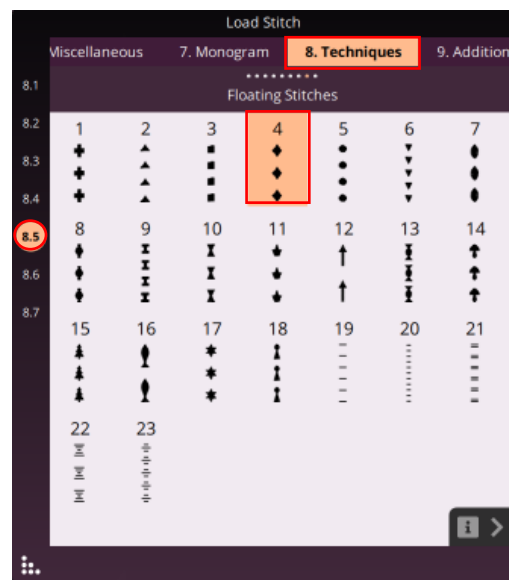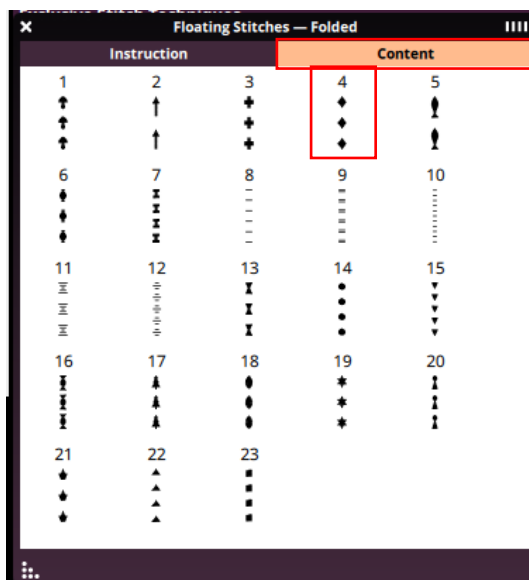



9. Place the stabilizer under 4" x 20 piece of Fabric #2.
10. Fold the fabric right sides together, making sure the stabilizer extends to the right of the folded fabric edge.
11. Place the fabric and stabilizer underneath the presser foot. Position the folded edge against the guide of the foot, letting it ride along the fabric edge.
12. Sew the length of the strip. Make sure that the straight stitch between the decorative part is running on the stabilizer only.

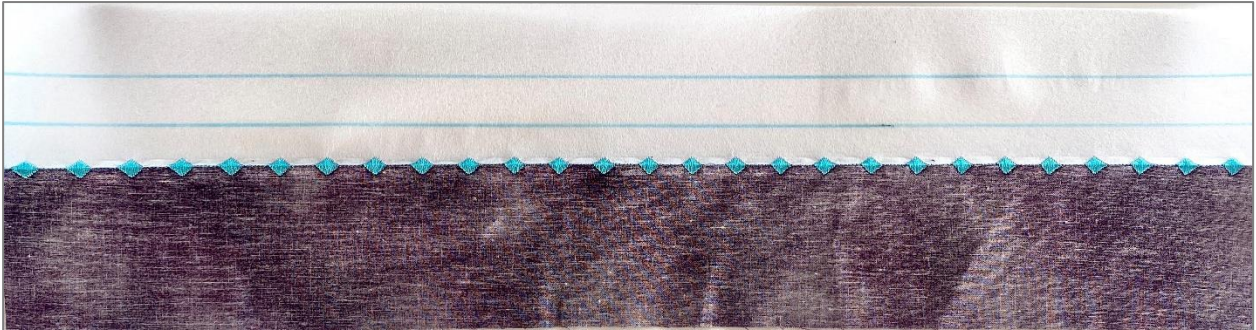

13. Once finished, unfold the fabric, giving it a good tug to bring all the decorative part of the stitch to the front. Tip: Iron your fabric to get a nice finish.

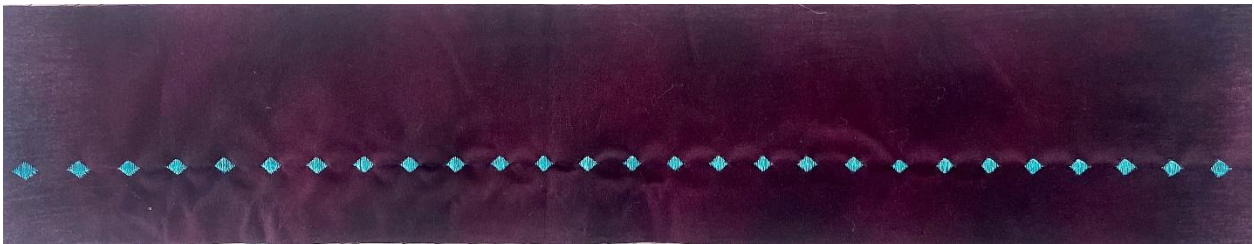

14. Fold the fabric right sides together on the second marked line, making sure the stabilizer extends to the right of the folded fabric edge.
15. Choose **Stitch 8.5.22** or a stitch of your choosing.

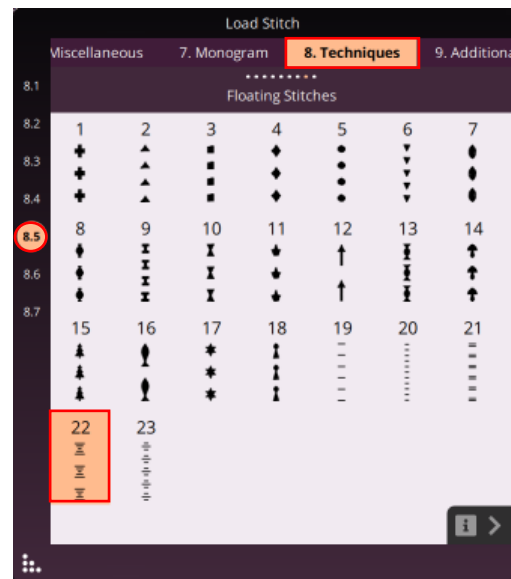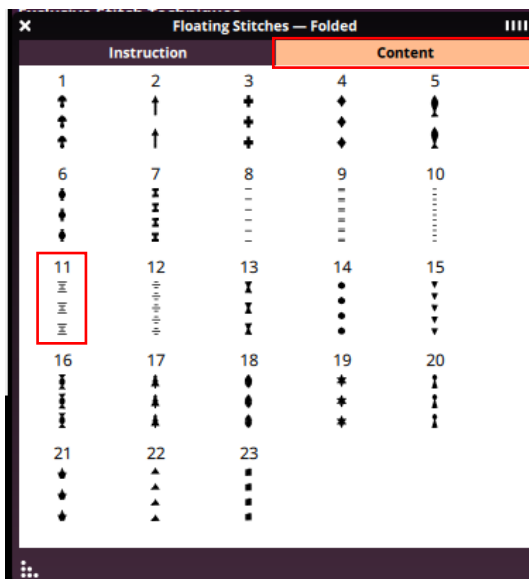

16. Sew the length of the strip.
17. Unfold the fabric, to bring all the decorative part of the stitch to the front. Press.
18. Fold the fabric right sides together on the third marked line, making sure the stabilizer extends to the right of the folded fabric edge.
19. Choose **Stitch 8.5.4** or a stitch of your choosing.
20. Sew the length of the strip.
21. Unfold the fabric, to bring all the decorative part of the stitch to the front.
22. Gently remove the stabilizer.
23. Press.
24. Cut the width of the strip to 3" making sure the stitches are centered on the strip.
25. Set aside for Class 11.

